


Ground Support Equipment | 10ft. Dollies

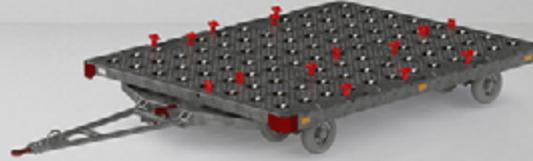

# CT-16

CARGO DOLLY

## Dimensions

Maximum length	5350 mm
Maximum width	2656 mm
Tara Weight	1390 kg
Max load	6800 kg
Suitable for	LD-3, LD-4, LD-7, LD-8, LD-11, ABU/PBM, AMD/M1H, AMX, AXY

## Specification

Finish	Hot dip galvanised
Turntable deck	No
Type of rollers	Castor rollers
Tow-Bar	1604 mm
Tow-Eye diameter	Ø40 mm
Parking brake	On front wheels, activated when in upright position
Type of steering	Turntable steering, 2 wheel steering
Tyres	8
Wheel type (dia)	3.00 D / 15 x 4,5 - 8
Maximum speed (unloaded)	25 km/h
Type of loading	Wide Edge Loading
Coupling	SPS E-Hitch

## Options

Coupling	Ringfeder, Rockinger
----------	----------------------

The specified dimensions and weight are indicative and no rights can be derived from this publication.

## Do you need a custom solution?

Our team of design experts and highly professional manufacturers will help by creating and planing the best solution for your need.

SPS BV Toekanweg 2, 1118 EB Schiphol, The Netherlands  
Phone: +31 20 354 00 63 | Mail: info@s-p-s.aero

SPS BV Toekanweg 2

